

Ceiling Tiles™ Direct Fix



Product Overview

Our Direct Fix Ceiling Tiles are manufactured from Decosorb™ Acoustic Panels. Decosorb™ is a light-weight but semi rigid acoustic panel made from 100% Polyester Fibre, specifically designed for functional acoustic clarity, reducing and controlling reverberated noise (echo) in interior spaces, with clean aesthetic.

Decosorb™ is incredibly versatile and highly durable. Available in a range of colour and thickness, it can be printed, grooved, folded, suspended, CNC profile cut, or simply clipped in place to either ceiling or wall, requiring no edging or capping. Decosorb™ truly offers designers a functional canvas for creativity.

Made from 60% recycled content and recyclable end-of-life Decosorb™ is a sustainably sound solution.

Solid Colour and smooth finish
Excellent acoustic performance
Customisable
Available with ReadyClip™ for glue-free installation.
Highly durable

Applications

Commercial Spaces:

Meeting Rooms
Learning / Training Spaces
Video Conferencing Rooms
Board Rooms
Office Pods
Reception Areas

Residential Spaces:

Home Office
Lounge / Living Rooms
Kids Rooms
Play Rooms

Customisation

 Rebated edge

 Chamfered edge

 CNC cut

 V- Groove

 Custom prints

 Ready-Clip™ (Patent Pending)
Glue Free mounting system

Ceiling Tiles™ Direct Fix



NRC 0.4 - 0.65*
*With no air gap



Ready-Clip™ (Patent Pending)
Glue Free mounting system



Standard Thicknesses:
12mm, 24mm



Standard Flat Edge



Sheet Size:
9mm, 24mm: 2440 x 1220
12mm: 1225 x 2800
max. 1200 x 2500 for groove and ready-clip



No loose fibres



Density:
24mm: 3600 gsm
12mm: 2400 gsm



Composition:
100% PET (up to 60% recycled content)



Fire rating
12mm: EN 13501-1:2018: B - s1, d0
24mm: EN 13501-1:2018: B - s2, d0



Manufactured in NZ
Non-Toxic, Non irritant
Glue Free, Low VOC



Antibacterial



Environmental:
Global Recycled Standard (GRS) 4.0
OEKO-TEX® Confidence In Textiles –
STANDARD 100. Tested for harmful
substances. Annex 6" Low VOC



DBSORB Ltd
Acoustic Systems
www.dbsorb.co.nz

Phone: (+64) 09 553 6775


Email: sales@dbsorb.co.nz

Address: 63S Hugo Johnston Drive, Penrose
Auckland 1061

Copyright © 2022 DBSORB Ltd
All Rights Reserved


9mm Acoustic Performance

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
No Air Gap	0.01	0.01	0.18	0.37	0.67	0.85	0.3
50mm gap	0.15	0.29	0.66	0.9	0.81	0.85	0.65
100mm gap	0.14	0.47	0.92	0.85	0.68	0.84	0.75
150mm gap	0.27	0.68	0.98	0.69	0.8	0.87	0.8

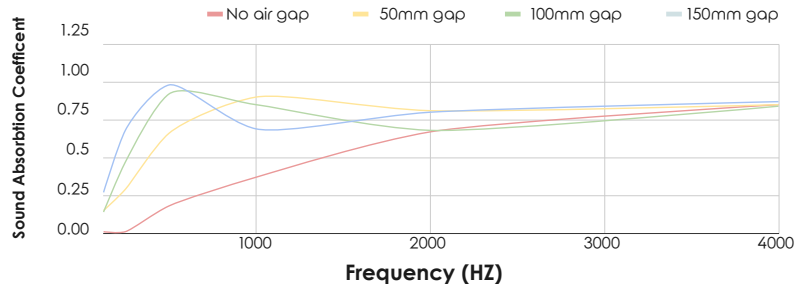

12mm Acoustic Performance

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
No Air Gap	0	0.05	0.2	0.55	0.85	1	0.4
50mm gap	0.1	0.25	0.65	0.99	0.98	0.92	0.7
100mm gap	0.23	0.49	0.89	0.99	0.78	0.92	0.8
150mm gap	0.39	0.85	0.97	0.8	0.9	0.91	0.9

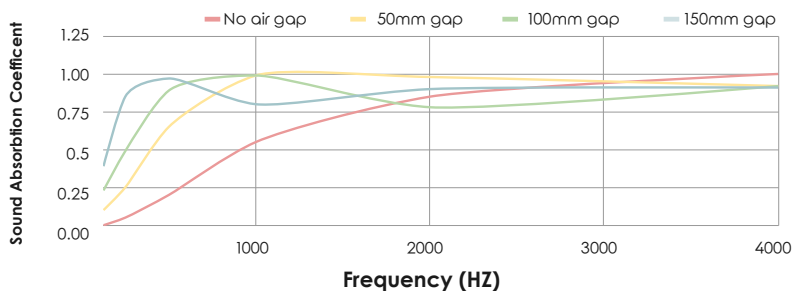

24mm Acoustic Performance

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
No Air Gap	0.01	0.15	0.55	0.9	1.05	1.05	0.65
50mm gap	1.0	0.29	0.73	0.98	0.94	0.96	0.75
100mm gap	0.24	0.62	0.99	0.98	0.94	0.99	0.85
150mm gap	0.39	0.8	0.99	0.86	0.94	0.98	0.9

